




Feeder for brochures and catalogues

Design and characteristic features:

- Feeding width 335 mm standard
- Single or multi product feeding
- Exact air gap adjustment of the separating slides via micrometer screws
- Belt conveyor with carriers for separation, adjustable in height by knurled nuts
- Product run-time monitoring for missing sheet detection
- Product magazine for loading is easily accessible
- Min. stack monitoring in the magazine
- Exit extension 300 mm, horizontal version
- Infinitely adjustable feeding speed
- Drive actuated via DC servo-motor
- As assembly version or with own, movable frame (option)
- RS 232-Interface



Controller:

- Microprocessor control
- PLC interface, 15 pins
- Operator guidance and status indication by 2-line LC display
- Preselection for piece number with NOM/ACT comparison
- Continuous mode operation selectable
- Function test for self-diagnosis
- Fault message indication by way of signal lamp and display
- Preselection of the start pulse (high/low)
- Adjustment of the product length for double sheet detection
- Adjustable product stop position
- Follow-up time of the air blast signal adjustable from 0 to 300 ms
- Operator language selectable
- Electric and electronic plug-type connections


Options:

- Tacho-generator control for external synchronization of the conveyor speed

LSA sliding feeder Technical Data (Standard configuration)

Format range (special formats possible):	Min. 210 x 60 mm, max. 300 x 335
Belt speed/ feeding performance (continuous mode / indexed), depending on product:	Max. 150 cycles/min.
Product passage:	Min. 2 mm, max. 30 mm
Magazine loading (depending on product):	230 mm stack height
Drive:	DC servo-motors, infinitely controllable
Control:	Microprocessor control, PLC interface, functions for no. of pieces, continuous mode, self-diagnosis, fault message etc.
Supply voltage / Power input	230 V / 50 Hz / 300 VA
Dimensions (W x D x H) / Weight:	965 x 463 x 460 mm (exit extension 300 mm) / approx. 54 kg, depending on design

Dimensions for standard model, feeding width 350 mm:

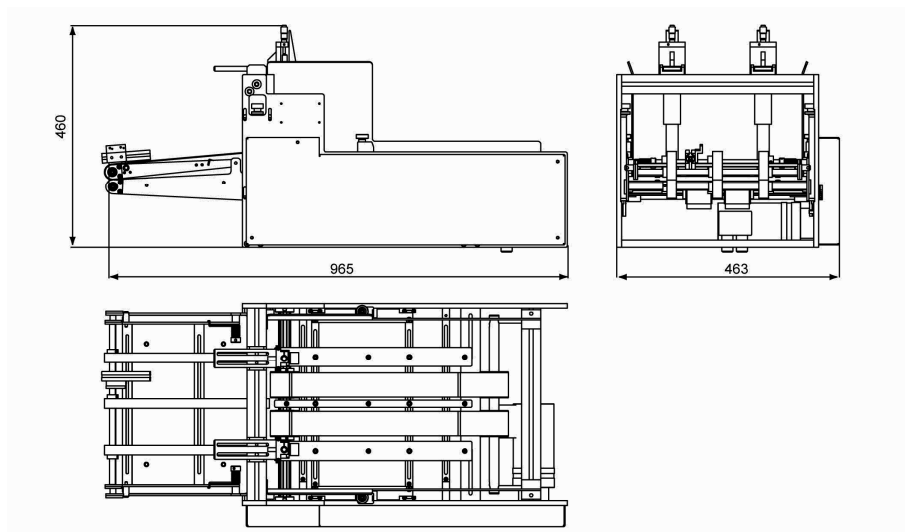

Options:

Tacho-generator control:	FW 520T, for signal 0 to 10 V
Magazine loading	
Autoloader:	500 mm to 3,000 mm
Stacking tray:	Stacking height up to 200 mm, level control
Start light barrier:	For external start pulse
Level control:	In the stack magazine
Warning lamp:	3 colours
Base frame:	Movable and vertically adjustable +/- 50 mm, Movable with electrically driven height setting, setting range +/- 200 mm

05/2009 Technical modifications reserved